

LCTM - WOUND PRIMARY SERIES



INPUT:

1 A
...
60 A

OUTPUTS:


5 A 1 A




	LCTM 62/W (40)	LCTM 74/W (45)
Depth	40 mm	45 mm
Width	62 mm	74 mm
Primary current	1 A...30 A	1 A...60 A
Secondary current	1 A, 5 A	
Accuracy class	0.2; 0.5; 1	

DIMENSIONS

LCTM 62/W (40)

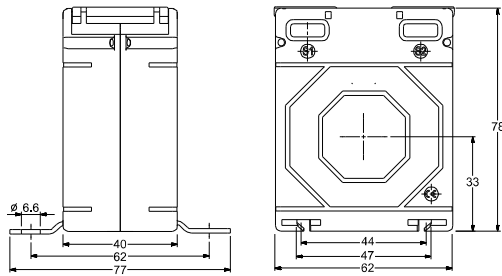

LCTM 74/W (45)

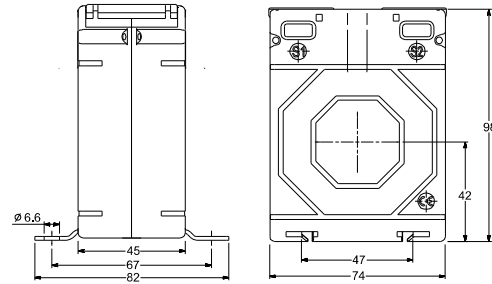

ORDERING CODES

LCTM 62W040

LCTM 74W045

Secondary current	Code
x/5A	5
x/1A	1

Secondary current	Code
x/5A	5
x/1A	1

Transformer type	LCTM 62/W (40)		
Accuracy class	0,2	0,5	1
Code	2	5	1

Transformer type	LCTM 74/W (45)		
Accuracy class	0.2	0.5	1
Code	2	5	1

Code	Rated primary current	Transformer burden		
0001A	1A	1 VA	2.5 VA	5 VA
02.5A	2.5 A	1 VA	2.5 VA	5 VA
0005A	5 A	1 VA	2.5 VA	5 VA
07.5A	7.5 A	1 VA	2.5 VA	5 VA
0010A	10 A	1 VA	2.5 VA	5 VA
0015A	15 A	1 VA	2.5 VA	5 VA
0020A	20 A	1 VA	2.5 VA	5 VA
0025A	25 A	1 VA	2.5 VA	5 VA
0030A	30 A	1 VA	2.5 VA	5 VA

Code	Rated primary current	Transformer burden		
0001A	1A	1.5 VA	5 VA	10 VA
02.5A	2.5 A	1.5 VA	5 VA	10 VA
0005A	5 A	1.5 VA	5 VA	10 VA
07.5A	7.5 A	1.5 VA	5 VA	10 VA
0010A	10 A	1.5 VA	5 VA	10 VA
0015A	15 A	1.5 VA	5 VA	10 VA
0020A	20 A	1.5 VA	5 VA	10 VA
0025A	25 A	1.5 VA	5 VA	10 VA
0030A	30 A	1.5 VA	5 VA	10 VA
0040A	40 A	1.5 VA	5 VA	10 VA
0050A	50 A	1.5 VA	5 VA	10 VA
0060A	60 A	1.5 VA	5 VA	10 VA

Ordering example: Order code LCTM 62W0400030A55 means the transformer LCTM 62/W(40) 30/5A; Class 0.5; power 2.5VA

ACCESSORIES:

DIN rail mounting base

Order code: LH000-0904-130-124

3 YEAR WARRANTY

shop.lumel.com.pl

EPLAN